

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 651 861 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.07.1998 Bulletin 1998/31

(51) Int Cl.⁶: **F16B 37/08**, F16B 39/36,
B23P 11/02

(21) Application number: **94914138.6**

(86) International application number:
PCT/US94/04024

(22) Date of filing: **12.04.1994**

(87) International publication number:
WO 94/24442 (27.10.1994 Gazette 1994/24)

(54) METHOD AND APPARATUS FOR ENGAGING THREADED MEMBERS

VERFAHREN UND VORRICHTUNG ZUR VERBINDUNG VON MIT GEWINDE VERSEHENEN
TEILEN

PROCEDE ET APPAREIL D'INSERTION D'ELEMENTS FILETES

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI LU NL PT SE

(72) Inventor: **FULLERTON, Robert L.**
Incline Village, NV 89450 (US)

(30) Priority: **16.04.1993 US 47199**

(74) Representative: **W.P. Thompson & Co.**
Coopers Building,
Church Street
Liverpool L1 3AB (GB)

(43) Date of publication of application:
10.05.1995 Bulletin 1995/19

(73) Proprietor: **FULLERTON, Robert L.**
Incline Village, NV 89450 (US)

(56) References cited:
US-A- 3 157 215 **US-A- 4 083 393**
US-A- 4 378 187 **US-A- 4 974 888**
US-A- 5 081 811

EP 0 651 861 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention relates to a coupling device featuring threaded members capable of rapid engagement and disengagement. Threaded coupling devices, such as conventional nuts and bolts, have often proven ineffective in highly specialized applications, for example, where speed is required, or where extended rotating movement is undesirable. Efforts have been made to design threaded coupling devices which may be assembled by rapid rectilinear movement followed by final tightening by rotating one member relative to the other. Just as there is a need to reduce the time and effort required to assemble threaded coupling members, there also exists a need to simplify and speed up the process of disengaging threaded coupling devices.

US-A-4083393 describes a nut having a series of segments in a tapered hole in a base part for sliding movement upwardly and downwardly to allow insertion of a bolt. Each segment includes a guide pin and an operation ring is provided including cam sections, each of the latter comprising a lower flat surface, an upper flat surface and an inclined surface connecting said upper flat surface with said lower flat surface, said lower and upper flat surfaces extending substantially parallel to the bearing end face of said base part, said cam sections engage said guide pins of said individual nut segments, respectively, to control said nut segments, whereby said nut segments are slidable upwardly on said inner surface of said tapered hole by rotation of said operation ring as well as by lifting of said nut segments and said guide pins therewith off said cam sections, respectively.

According to one aspect of the present invention there is provided a coupling device comprising:

- a first member provided with threads;
- a second member having an opening therein lying along a longitudinal axis into and out of which said first member may be inserted and removed;
- said second member including a first frustoconical surface and a second frustoconical surface spaced from said first frustoconical surface;
- a plurality of threaded elements each having internal threads a first frustoconical bearing surface for sliding movement with respect to said first frustoconical surface on said second member and a second frustoconical bearing surface for sliding movement with respect to said second frustoconical surface on said second member
- means mounting said threaded elements for movement outwardly with respect to the longitudinal axis of said second member
- means normally urging said threaded elements inwardly with respect to the longitudinal axis of the second member whereby the inward sliding movement of said first member within said opening of said second member along said longitudinal axis causes said threaded elements to move radially

outward by sliding action along said first and second frustoconical surfaces of said second member and said first and second bearing surfaces of said threaded elements after which brief rotating movement of said first member tightly moves said first member into engagement with said second member; and

means moving said threaded elements radially outward by sliding cooperation between said first and second frustoconical surfaces and said first and second frustoconical bearing surfaces thereby permitting said first member to be moved outwardly along said axis by sliding movement.

Also according to the present invention there is provided a method of rapidly engaging and disengaging first and second coupling members provided with external and internal threads, respectively, comprising the steps of:

- inserting the first coupling member within the second coupling member;
- insertion of the first member causing the internal threads of the second coupling member, which threads on a plurality of threaded elements forming part of said second coupling member, to move apart from each other by sliding action along first and second spaced frustoconical surfaces of said second member and first and second frustoconical bearing surfaces of said threaded elements;
- continuing to move the first coupling member within the second coupling member by sliding movement;
- briefly rotating the first coupling member such that the external threads thereof tightly engage the internal threads of the second coupling member locking the coupling members together;
- rotating the first coupling member in the opposite direction to release the tight engagement between the external threads of the first coupling member and the internal threads of the second coupling member;
- moving the internal threads of the second coupling member apart from each other; and
- removing the first coupling member from the second coupling member by sliding movement.

The coupling device of the present invention includes a first member provided with external threads and a second member having an opening therein into which the first member is inserted. The second member is provided with pluralities of movably mounted internally threaded elements for receiving the external threads of the first member. Structure is provided whereby the first member may be inserted within the second member by rectilinear sliding movement for a predetermined distance after which the first member may be rotated into tight engagement with the second member. Release of the first member may be accomplished simply by rotat-

ing the first member very slightly in the opposite direction, after which simple manual manipulation of the second member withdraws the threaded elements from engagement permitting the first member to be slidably removed axially from the second member. With the present invention it is therefore possible to attach and detach threaded couplings quickly with only minimal rotating action.

The invention will now be further described by way example with reference to the accompanying drawings, in which:-

Fig. 1 is a perspective view illustrating generally the components of the coupling device, including the first externally threaded member and the second internally threaded member which receives the first member;

Fig. 2 is an exploded perspective view illustrating the parts of the second coupling member, particularly the structure for movably mounting the internally threaded elements and the key elements for causing the internally threaded elements to withdraw facilitating easy sliding removal of the first member in an axial direction along a rectilinear path;

Fig. 3 is a sectional view taken along line 3-3 of Fig. 1 illustrating in particular the various frustoconical surfaces within the second coupling member;

Fig. 4 is an enlarged cross-sectional view of the threads of the movably mounted threaded elements;

Fig. 5 is an enlarged cross-sectional view of one of the movably mounted threaded elements, illustrating in particular the spring-biased washer for exerting downward pressure thereon to normally urge the threaded element inwardly in a radial direction, and the associated key element manually operated by the user to urge the threaded element outwardly in a radial direction to release the first coupling member;

Fig. 6 is a sectional view of the coupling device illustrating the position of the various parts of the second coupling member prior to introducing the first member therein;

Fig. 7 is a sectional view of the coupling device illustrating the position of the parts of the second coupling member during movement of the externally threaded first member into the internally threaded second member;

Fig. 8 is a sectional view of the coupling device illustrating the position of the parts of the second coupling member when the first coupling member is fully threaded therein;

Fig. 9 is a sectional view of the coupling device illustrating the position of the parts of the second coupling member when manual force is applied thereto withdrawing the threaded elements of the second coupling member thereby releasing the first cou-

pling member for sliding, outward movement along a rectilinear path; and

Fig. 10 is a schematic diagram illustrating the crest-to-crest relationship of the threads 16 of the first member or bolt 10 and the threads 29 of the threaded sections 28 during sliding movement of the first member into the second coupling member.

As seen in Fig. 1, the coupling device of the present invention includes a first member 10 provided with threads and a second member 12 having a threaded opening therein into which the first member 10 may be inserted in locking relationship. More specifically, the first member 10 in the preferred embodiment is a bolt provided with a head 14 and helical threads 16 on the shaft thereof. The second member 12 will now be described with reference to Figs. 2, 3 and 6.

The second member 12 includes a sleeve 18 into which is slidably mounted a cylinder 20. The cylinder 20 is provided with a series of slots 22 through which corresponding keys 24 pass. The keys 24 are attached to the sleeve 18 with fasteners 26.

The cylinder 20 is provided with a frustoconical surface 19, as best seen in Fig. 3. More particularly, the frustoconical surface 19 is a surface of revolution extending at an acute angle α to the longitudinal axis of the sleeve 18 and cylinder 20 along which the first member 10 moves. A second frustoconical surface 21 is provided within the cylinder 20 extending at an acute angle α to the longitudinal axis of the sleeve 18 and the cylinder 20.

A plurality of movably mounted, externally threaded elements generally designated by the reference numeral 28 are positioned within the lower cavity of the cylinder 20. The movably mounted threaded elements 28, which in the preferred embodiment are three in number, are held in place and urged downwardly within the cavity 30 by the washer 32, as explained hereinafter. As illustrated in Fig. 4, the movably mounted threaded elements 28 are provided with internal threads 29 coaxial with the cylinder 20. The internal threads 29 have an apex angle β .

The second member 12 includes a cap 34 which is mounted for movement relative to the sleeve 18. The cap 34 includes a shoulder 36 provided with threads 38 which engage threads 39 of the cylinder 20 permitting the cap 34 to be screwed in place within the cylinder 20. A hole 35A is provided in the shoulder 36 for receiving a locking pin 37 which passes through the hole 21A in the cylinder 20. In this manner, proper alignment of the cap 34 and the cylinder 20 with the slots 22 and key elements 24, sleeve 18 and the threaded elements 28 is insured. As seen in Figs. 2-3, a coil spring 40 is positioned within the gap 42 between the outer wall of the cap 34 and the inner wall of the sleeve 18. The coil spring 40 normally urges the cap 34 and the sleeve 18 in opposite directions.

A second coil spring 44 is positioned within the cav-

ity 46 between the shoulder 48 of the cap 34 and the lip 50 of the washer 32. The second coil spring 44 normally urges the washer 32 downwardly such that the lip 50 thereof engages the upper edges 54 of the movably mounted threaded elements 28, as seen in Fig. 5.

The cross section of each of the movably mounted internally threaded elements 28 is depicted in Figs. 3, 5 and 6. Each threaded element 28 includes at the top on the inner surface thereof a frustoconical surface 52 terminating at the upper portion thereof in the edge 54 against which the bottom of the lip 50 of the washer 32 abuts. Each of the elements 28 is also provided with a frustoconical surface 55 extending at an acute angle α to the axis of the sleeve 18, thus permitting easy sliding movement between the frustoconical surfaces 21 and 55.

Still further, each of the movably mounted internally threaded elements 28 is provided near the bottom thereof with a frustoconical surface 56 which extends at an acute angle α to the axis of the cylinder 20. The frustoconical surfaces 56 of the movably mounted threaded elements 28 are thereby adapted to axially abut and slide on the frustoconical surface 19 of the cylinder 20.

Moreover, the frustoconical surface 56A of each of the elements 28 abuts the sloping surface 58 of each of the keys 24.

In the preferred embodiment of the present invention, the acute angle α (Fig. 3) of the aforementioned frustoconical surfaces is less than the apex angle β of the threads 29 of the elements 28. Thus, the inclined surfaces of the threads 29 extend at greater acute angles to the axis of the cylinder 20, then the frustoconical surfaces of the cylinder 20. By way of example only, with a bolt having threads 16 and elements 28 having threads 29 of apex angles of 60° , it is advantageous to form the aforementioned frustoconical surfaces of angles α of approximately 45° .

The structural relationship between the keys 24 and the movably mounted internally threaded elements 28 and the operation thereof will now be described. Each of the keys 24 protrudes through a slot 22 formed in the cylinder 20 and engages the sloping surface 56A of the movably mounted threaded element 28. As seen in Fig. 5, each of the threaded elements 28 is provided with a notch 57 defining the downwardly sloping contact surface area 56A which is complementary in configuration with respect to the downwardly sloping contact surface 58 of the key 24. Thus, as the cap 34 is manually moved closer to the sleeve 18, the keys 24 move upwardly causing the threaded elements 28 to move outwardly disengaging the threads 29 thereof from the threads 16 of the first member 10.

Fig. 6 illustrates the position of the movably mounted, internally threaded elements 28 before the first member or bolt 10 is inserted within the second member 12. It will be apparent that the groups of threaded elements 28 are urged inwardly towards each other in an axial direction by the force of the second spring 44. Fig.

7 illustrates the position of the parts when the first member or bolt 10 is moved into the second member 12 by sliding movement, i.e., the bolt 10 is moved inwardly merely by pushing it without rotation. It will be apparent that as the threads 16 of the first member 10 engage the threads 29 of each of the threaded elements 28, the elements 28 are moved radially outward. With reference to the schematic of Fig. 10, it can be seen that during sliding movement of the bolt 10, the threads 16 and 29 are in crest-to-crest relationship. With the threads 16 and 29 in this position, the bolt 10 could be advanced by rotation, if desired, but in accordance with the objectives of the present invention only sliding movement is used.

Fig. 8 illustrates the first member or bolt 10 fully inserted within the second member 12. After the first member or bolt 10 is pushed all the way into the second member 12, or as close thereto as may be desired or practical, the head 14 is manually rotated until the inside surface 61 of the head 14 abuts the lower surface 62 of the sleeve 18, thus locking the first member 10 within the second member 12. It is understood that since the threaded elements 28 are movably mounted within the cylinder 20, there is some capability of movement even when the bolt 10 is being inserted within the elements 28. Thus, when the head 14 of the bolt 10 is rotated the frictional force between the threads 16 and 29 is enhanced by the resiliency of the engagement between the threaded elements 28 and the threaded bolt 10. That is, because the threaded elements 28 are not rigidly positioned within the cylinder 20--as in the case of most fastening nuts--the tightening of the bolt 10 by rotation tends to resiliently urge the threaded elements 28 downwardly providing an unusually tight locking action. Safety features are provided to guard against accidental unlocking. The cap 34 is continuous metal to base to guard against "bump release;" the shoulder 35 of the sleeve 18 must be pulled toward the cap 34 to effect release. Also, the shoulder 35 of the sleeve can not be moved toward the cap 34 until the tension between the threads is released.

Fig. 9 illustrates releasing of the first member 10. More particularly, as the cap 34 and the shoulder 35 of the sleeve 18 are moved in close proximity to one another against the force of the first coil spring 40, the upward movement of the keys 24, and the sliding movement of the supporting surfaces 58 of the keys 24 and the supporting surfaces 56 of the threaded elements 28 promoted thereby, move the threaded elements 28 outwardly away from each other in a radial direction, thus releasing the engagement between the threads 16 of the first member 10 and the threads 29 of the threaded elements 28, thus permitting the first member 10 to be removed by rectilinear, sliding movement. It is to be noted, returning to Fig. 8, that the first member or bolt 10 is locked securely in place by rotation, as previously described. It is therefore necessary, before the first member 10 can be released, to rotate same briefly in a coun-

terclockwise direction to release the locking action between the threads 16 and 29. With the foregoing in mind, after the first member 10 is briefly rotated counterclockwise, the shoulder 35 of the sleeve 18 is moved towards the cap 34, thus withdrawing the threaded elements 28 releasing the first member 10. If, for example, the coupling device of the present invention is oriented vertically such as seen in Fig. 9, after unlocking the bolt 10 and moving the shoulder 35 of the sleeve 18 upwardly towards the cap 34, the bolt 10 will actually drop freely from the assembly under the influence of gravity.

Although a preferred embodiment of the present invention has been described, it is to be understood that other embodiments may exist and changes made without departing from scope of the invention.

Claims

1. A coupling device comprising:

a first member (10) provided with threads (16);
a second member (12) having an opening therein lying along a longitudinal axis into and out of which said first member (10) may be inserted and removed;

said second member (12) including a first frustoconical surface (19) and a second frustoconical surface (21) spaced from said first frustoconical surface (19);

a plurality of threaded elements (28) each having internal threads (29) a first frustoconical bearing surface (56) for sliding movement with respect to said first frustoconical surface (19) on said second member and a second frustoconical bearing surface (55) for sliding movement with respect to said second frustoconical surface (21) on said second member
means (32,34) mounting said threaded elements for movement outwardly with respect to the longitudinal axis of said second member (12)

means normally urging said threaded elements inwardly with respect to the longitudinal axis of the second member (12) whereby the inward sliding movement of said first member (10) within said opening of said second member (12) along said longitudinal axis causes said threaded elements (28) to move radially outward by sliding action along said first and second frustoconical surfaces of said second member and said first and second bearing surfaces of said threaded elements after which brief rotating movement of said first member (10) tightly moves said first member (10) into engagement with said second member (12); and

means (24,58) moving said threaded elements

(28) radially outward by sliding cooperation between said first and second frustoconical surfaces (19,21) and said first and second frustoconical bearing surfaces (55,56) thereby permitting said first member (10) to be moved outwardly along said axis by sliding movement.

2. A coupling device as claimed in claim 1, wherein said threaded elements (28) comprise a plurality of internally threaded elements having frustoconical surfaces (52,55,56) mating with corresponding frustoconical surfaces (52A,21,19) within the second member (12) thus permitting said threaded elements (28) to move inwardly and outwardly in a radial direction relative to the second member (12) and means biasing said threaded elements (28) inwardly within said second member (12).

3. A coupling device as claimed in claim 1 or 2, wherein said means moving said threaded elements (28) radially outward comprises a movably mounted key element (24) associated with each of said threaded elements (28) and provided with a sloping supporting surface (58), each of said threaded elements (28) having a corresponding sloping supporting surface (56A), such that movement of said key elements (24) causes sliding movement of said threaded elements (28) along the juncture of said sloping supporting surfaces (58,56A) moving said internally threaded elements (28) outwardly.

4. A coupling device as claimed in claim 3, wherein said means moving said threaded elements (28) outwardly further comprises a cap (34) associated with said second member (12), means (40) biasing said cap (34) away from said second member (12), said threaded elements (28) being movable with said cap (34) wherein said key elements (24) move with said second member (12), such that movement of said cap (34) and said second member (28) towards each other against the force of said biasing means (40) causes the aforementioned movement of said key elements (24).

5. A coupling device as claimed in claim 1 or 2, wherein said second member (12) comprises a cylinder (20) provided with a plurality of slots (22) therein, a plurality of threaded elements (28), means mounting said elements to move between a first inner position wherein the threads (29) are positioned to mate with the threads (16) of said first member (10) and a second, outer position wherein the threads (29) are out of engagement with the threads (16) of said first member (10), means urging said threaded elements (28) to said first, inner position, slotted portions (57) within said threaded elements including inclined supporting surfaces (56A), and wherein said means moving said threaded elements (28)

outwardly permitting said first member (10) to move outwardly along said axis by sliding movement comprises key elements (24) extending through said slots (22) of said cylinder including sloping supporting surfaces (58) engaging the supporting surfaces (56A) of said threaded elements (28) and means moving said keys (24) upwardly causing said threaded elements (28) to move outwardly towards said second position as there is sliding movement between the supporting surfaces (58,56A) of the keys (24) and the threaded elements (28).

6. A coupling device as claimed in claim 5, wherein said means moving said key elements (24) comprises a sleeve (18), said key elements (24) secured to said sleeve (18), a cap (34) connected to said cylinder (20), spring means (40) urging said cap (34) and sleeve (18) away from each other, such that manual movement of said cap (34) and sleeve (18) towards each other moves said key elements (24), the sliding action between said supporting surfaces (58,56A) of said key elements (24) and the threaded elements (28) moving said threaded elements (28) to their second outer position.

7. A coupling device as claimed in any one of the preceding claims, wherein said first and second frustoconical surfaces (19,21) on said second member (12) and said first and second frustoconical bearing surfaces (56,55) on said threaded elements (28) each extend at the same angle with respect to the longitudinal axis of the second member (12).

8. A coupling device as claimed in any one of the preceding claims, in which said brief rotating movement of said first member (10) causes the frictional force between said threads (16,29) to be enhanced because of the resiliency of the engagement between said threads (16) of the first member (10) and said threads (29) of said threaded elements (28).

9. A method of rapidly engaging and disengaging first and second coupling members (10,12) provided with external and internal threads (16,29), respectively, comprising the steps of:

inserting the first coupling member within the second coupling member;
insertion of the first member causing the internal threads (29) of the second coupling member, which threads on a plurality of threaded elements (28) forming part of said second coupling member (12), to move apart from each other by sliding action along first and second spaced frustoconical surfaces (19,21) of said second member and first and second frustoconical bearing surfaces (56,55) of said threaded elements (28);

continuing to move the first coupling member (10) within the second coupling member (12) by sliding movement;
briefly rotating the first coupling member (10) such that the external threads thereof tightly engage the internal threads of the second coupling member (12) locking the coupling members (10,12) together;
rotating the first coupling member (10) in the opposite direction to release the tight engagement between the external threads of the first coupling member (10) and the internal threads of the second coupling member (12);
moving the internal threads of the second coupling member (12) apart from each other; and
removing the first coupling member (10) from the second coupling member (12) by sliding movement.

Patentansprüche

1. Kuppelvorrichtung, umfassend:

ein erstes Teil (10) mit Gewinde (16);
ein zweites Teil (12) mit einer darin über eine Längsachse verlaufenden Öffnung, in die und aus der das genannte erste Teil (10) eingefügt und herausgenommen werden kann;
wobei das genannte zweite Teil (12) eine erste kegelstumpfförmige Fläche (19) und eine zweite kegelstumpfförmige Fläche (21) aufweist, die von der genannten ersten kegelstumpfförmigen Fläche (19) beabstandet ist;
eine Mehrzahl von Gewindeelementen (28), die jeweils ein Innengewinde (29), eine erste kegelstumpfförmige Tragfläche (56) für eine Gleitbewegung in bezug auf die genannte erste kegelstumpfförmige Fläche (19) an dem genannten zweiten Teil und eine zweite kegelstumpfförmige Tragfläche (55) für eine Gleitbewegung in bezug auf die genannte zweite kegelstumpfförmige Fläche (21) an dem genannten zweiten Teil aufweisen,
ein Mittel (32, 34), das die genannten Gewindeelemente für eine Bewegung nach außen in bezug auf die Längsachse des genannten zweiten Teils (12) hält;
ein Mittel, das die genannten Gewindeelemente normalerweise nach innen in bezug auf die Längsachse des zweiten Teils (12) drückt, wobei die nach innen gerichtete Gleitbewegung des genannten ersten Teils (10) innerhalb der genannten Öffnung des genannten zweiten Teils (12) über die genannte Längsachse bewirkt, daß sich die genannten Gewindeelemente (28) durch einen Gleitvorgang über die genannte erste und die zweite kegelstumpfförmige

ge Fläche des genannten zweiten Teils und die genannte erste und die zweite Tragfläche der genannten Gewindeelemente radial nach außen bewegen, wonach eine kurze Drehbewegung des genannten ersten Teils (10) das ge-

2. Kuppelvorrichtung nach Anspruch 1, bei der die genannten Gewindeelemente (28) eine Mehrzahl von Innengewindeelementen mit kegelstumpfförmigen Flächen (52, 55, 56) umfassen, die mit entsprechenden kegelstumpfförmigen Flächen (52A, 21, 19) in dem zweiten Teil (12) übereinstimmen, wodurch sich die genannten Gewindeelemente (28) in radialer Richtung relativ zu dem zweiten Teil (12) nach innen und nach außen bewegen können, und ein Mittel, das die genannten Gewindeelemente (28) in dem genannten zweiten Teil (12) nach innen vor-
3. Kuppelvorrichtung nach Anspruch 1 oder 2, bei der das genannte Mittel, das die genannten Gewindeelemente (28) radial nach außen bewegt, ein beweglich befestigtes Splintelement (24) in Zusammenhang mit jedem der genannten Gewindeelemente (28) umfaßt, das mit einer geneigten Auflagefläche (58) versehen ist, wobei jedes der genannten Gewindeelemente (28) eine entsprechend geneigte Auflagefläche (56A) hat, so daß die Bewegung der genannten Splintelemente (24) eine Gleitbewegung der genannten Gewindeelemente (28) über die Verbindungsstelle der genannten geneigten Auflageflächen (58, 56A) veranlaßt, so daß die genannten Innengewindeelemente (28) nach außen bewegt werden.
4. Kuppelvorrichtung nach Anspruch 3, bei der das genannte Mittel, das die genannten Gewindeelemente (28) nach außen bewegt, ferner eine Kappe (34) in Zusammenhang mit dem genannten zweiten Teil (12) und ein Mittel (40) umfaßt, das die genannte Kappe (34) von dem genannten zweiten Teil (12) unter Spannung fernhält, wobei die genannten Gewindeelemente (28) mit der genannten Kappe (34) bewegt werden können, in der sich die genannten Splintelemente (24) mit dem genannten zweiten Teil (12) bewegen, so daß die Bewegung der ge-

nannten Kappe (34) und des genannten zweiten Teils (28) zueinander hin gegen die Kraft des genannten Vorspannmittels (40) die zuvor genannte Bewegung der genannten Splintelemente (24) bewirkt.

5. Kuppelvorrichtung nach Anspruch 1 oder 2, bei der das genannte zweite Teil (12) folgendes umfaßt: einen Zylinder (20), der mit einer Mehrzahl von Schlitzen (22) versehen ist, eine Mehrzahl von Gewindeelementen (28), ein Mittel, das die genannten Elemente hält, so daß sich diese zwischen einer ersten inneren Position, in der die Gewinde (29) so positioniert sind, daß sie in die Gewinde (16) des genannten ersten Teils (10) greifen, und einer zweiten äußeren Position bewegen, in der sich die Gewinde (29) nicht im Eingriff mit den Gewinden (16) des genannten ersten Teils (10) befinden, ein Mittel, das die genannten Gewindeelemente (28) in die genannte erste innere Position drängt, geschlitzte Abschnitte (57) in den genannten Gewindeelementen, die schräg verlaufende Auflageflächen (56A) beinhalten, und bei der das genannte Mittel, das die genannten Gewindeelemente (28) nach außen bewegt, so daß sich das genannte erste Teil (10) durch Gleitbewegung über die genannte Achse nach außen bewegen kann, Splintelemente (24) umfaßt, die durch die genannten Schlitze (22) des genannten Zylinders verlaufen, mit geneigten Auflageflächen (58), die in die Auflageflächen (56A) der genannten Gewindeelemente (28) eingreifen, und ein Mittel, das die genannten Splinte (24) nach oben bewegt, wodurch die genannten Gewindeelemente (28) nach außen zur genannten zweiten Position bewegt werden, da eine Gleitbewegung zwischen den Auflageflächen (58, 56A) der Splint (24) und den Gewindeelementen (28) stattfindet.
6. Kuppelvorrichtung nach Anspruch 5, bei der das genannte Mittel zum Bewegen der genannten Splintelemente (24) eine Hülse (18) umfaßt, wobei die genannten Splintelemente (24) an der genannten Hülse (18) befestigt sind, eine mit dem genannten Zylinder (20) verbundene Kappe (34), eine Feder (40), die die genannte Kappe (34) und die Hülse (18) voneinander wegdrückt, so daß durch eine manuelle Bewegung der genannten Kappe (34) und der Hülse (18) zueinander hin die genannten Splintelemente (24) bewegt werden, wobei durch den Gleitvorgang zwischen den genannten Auflageflächen (58, 56A) der genannten Splintelemente (24) und der Gewindeelemente (28) die genannten Gewindeelemente (28) in ihre zweite äußere Position bewegt werden.
7. Kuppelvorrichtung nach einem der vorherigen Ansprüche, bei der die genannte erste und die zweite kegelstumpfförmige Fläche (19, 21) an dem ge-

nannten zweiten Teil (12) und die genannte erste und die zweite kegelstumpfförmige Tragfläche (56, 55) an den genannten Gewindeelementen (28) in bezug auf die Längsachse des zweiten Teils (12) jeweils im gleichen Winkel verlaufen.

8. Kuppelvorrichtung nach einem der vorherigen Ansprüche, bei der die genannte kurze Drehbewegung des genannten ersten Teils (10) bewirkt, daß die Reibungskraft zwischen den genannten Gewinden (16, 29) aufgrund der Elastizität des Eingriffs zwischen den genannten Gewinden (16) des ersten Teils (10) und den genannten Gewinden (29) der genannten Gewindeelemente (28) verstärkt wird.

9. Verfahren zum schnellen Verbinden und Trennen eines ersten und eines zweiten Kuppelteils (10, 12), die jeweils ein Außen- und ein Innengewinde (16, 29) aufweisen, umfassend die folgenden Schritte:

Einfügen des ersten Kuppelteils in das zweite Kuppelteil;

wobei das Einfügen des ersten Teils bewirkt, daß sich die Innengewinde (29) des zweiten Kuppelteils, das auf eine Mehrzahl von Gewindeelementen (28) geschraubt wird*, die einen Bestandteil des genannten zweiten Kuppelteils (12) bilden, durch einen Gleitvorgang über die erste und die zweite voneinander beabstandete kegelstumpfförmige Fläche (19, 21) des genannten zweiten Teils und die erste und die zweite kegelstumpfförmige Tragfläche (56, 55) der genannten Gewindeelemente (28) voneinander wegbewegen;

Fortsetzen der Bewegung des ersten Kuppelteils (10) in dem zweiten Kuppelteil (12) durch Gleitbewegung;

kurzes Drehen des ersten Kuppelteils (10), so daß sein Außengewinde fest in das Innengewinde des zweiten Kuppelteils (12) eingreift, wodurch die Kuppelteile (10, 12) miteinander verriegelt werden;

Drehen des ersten Kuppelteils (10) in entgegengesetzter Richtung, um den festen Eingriff zwischen dem Außengewinde des ersten Kuppelteils (10) und dem Innengewinde des zweiten Kuppelteils (12) zu lösen;

Wegbewegen der Innengewinde des zweiten Kuppelteils (12) voneinander;

Entfernen des ersten Kuppelteils (10) von dem zweiten Kuppelteil (12) durch Gleitbewegung.

Revendications

1. Dispositif de couplage comprenant :

un premier élément (10) pourvu de filetages

(16) ;

un deuxième élément (12) dans lequel il y a une ouverture située selon un axe longitudinal dans laquelle ledit premier élément (10) peut être introduit et retiré ;

ledit deuxième élément (12) comprenant une première surface tronconique (19) et une deuxième surface tronconique (21) espacée de ladite première surface tronconique (19) ;

une pluralité d'éléments filetés (28) ayant chacun des filetages intérieurs (29), une première surface de support tronconique (56) permettant un mouvement de coulissement par rapport à ladite première surface tronconique (19) sur ledit deuxième élément et une deuxième surface de support tronconique (55) permettant un mouvement de coulissement par rapport à ladite deuxième surface tronconique (21) sur ledit deuxième élément ;

des moyens (32, 34) sur lesquels sont montés lesdits éléments filetés pour pouvoir se déplacer vers l'extérieur par rapport à l'axe longitudinal dudit deuxième élément (12) ;

des moyens sollicitant normalement lesdits éléments filetés vers l'intérieur par rapport à l'axe longitudinal du deuxième élément (12), de telle manière que le mouvement de coulissement vers l'intérieur dudit premier élément (10) dans ladite ouverture dudit deuxième élément (12) le long dudit axe longitudinal provoque le déplacement desdits éléments filetés (28) radialement vers l'extérieur par une action de coulissement le long desdites première et deuxième surfaces tronconiques dudit deuxième élément et desdites première et deuxième surfaces de support desdits éléments filetés, après quoi un bref mouvement de rotation dudit premier élément (10) déplace étroitement ledit premier élément (10) en prise avec ledit deuxième élément (12) ; et

des moyens (24, 58) déplaçant lesdits éléments filetés (28) radialement vers l'extérieur par coopération de coulissement entre lesdites première et deuxième surfaces tronconiques (19, 21) et lesdites première et deuxième surfaces de support tronconiques (55, 56) permettant ainsi le déplacement dudit premier élément (10) vers l'extérieur le long dudit axe par un mouvement de coulissement.

2. Dispositif de couplage selon la revendication 1, dans lequel lesdits éléments filetés (28) comprennent une pluralité d'éléments filetés intérieurement ayant des surfaces tronconiques (52, 55, 56) s'accouplant avec des surfaces tronconiques correspondantes (52A, 21, 19) dans le deuxième élément (12) permettant ainsi le déplacement vers l'intérieur et vers l'extérieur desdits éléments filetés (28) dans

une direction radiale par rapport au deuxième élément (12) et des moyens sollicitant lesdits éléments filetés (28) vers l'intérieur dans ledit deuxième élément (12).

3. Dispositif de couplage selon la revendication 1 ou 2, dans lequel lesdits moyens déplaçant lesdits éléments filetés (28) radialement vers l'extérieur comprennent un élément formant clé monté de manière mobile (24) associé à chacun desdits éléments filetés (28) et pourvu d'une surface de support inclinée (58), chacun desdits éléments filetés (28) ayant une surface de support inclinée (56A) correspondante, de sorte que le mouvement desdits éléments formant clés (24) provoque le mouvement de coulisement desdits éléments filetés (28) le long de la jonction desdites surfaces de support inclinées (58, 56A) déplaçant lesdits éléments filetés intérieurement (28) vers l'extérieur.
4. Dispositif de couplage selon la revendication 3, dans lequel lesdits moyens déplaçant lesdits éléments filetés (28) vers l'extérieur comprennent également un capuchon (34) associé audit deuxième élément (12), des moyens (40) sollicitant ledit capuchon (34) à l'opposé dudit deuxième élément (12), lesdits éléments filetés (28) pouvant être déplacés avec ledit capuchon (34) de sorte que lesdits éléments formant clés (24) se déplacent avec ledit deuxième élément (12), de telle manière que le mouvement dudit capuchon (34) et dudit deuxième élément (28) l'un vers l'autre contre la force desdits moyens de sollicitation (40) provoque le mouvement mentionné précédemment desdits éléments formant clés (24).
5. Dispositif de couplage selon la revendication 1 ou 2, dans lequel ledit deuxième élément (12) comprend un cylindre (20) pourvu d'une pluralité de fentes (22), une pluralité d'éléments filetés (28), des moyens sur lesquels sont montés lesdits éléments pour permettre leur déplacement entre une première position intérieure à laquelle les filetages (29) sont positionnés pour s'accoupler avec les filetages (16) dudit premier élément (10) et une deuxième position extérieure à laquelle les filetages (29) ne sont pas en prise avec les filetages (16) dudit premier élément (10), des moyens sollicitant lesdits éléments filetés (28) à ladite première position intérieure, des parties en fente (57) dans lesdits éléments filetés comprenant des surfaces de support inclinées (56A), et dans lequel lesdits moyens déplaçant lesdits éléments filetés (28) vers l'extérieur en permettant audit premier élément (10) de se déplacer vers l'extérieur le long dudit axe par mouvement de coulisement comprennent des éléments formant clés (24) s'étendant à travers lesdites fentes (22) dudit cylindre comprenant des surfaces de

support inclinées (58) se mettant en prise avec les surfaces de support (56A) desdits éléments filetés (28) et des moyens déplaçant lesdites clés (24) vers le haut provoquant le déplacement vers l'extérieur desdits éléments filetés (28) vers ladite deuxième position en raison du mouvement de coulisement entre les surfaces de support (58, 56A) des clés (24) et des éléments filetés (28).

6. Dispositif de couplage selon la revendication 5, dans lequel lesdits moyens déplaçant lesdits éléments formant clés (24) comprennent un manchon (18), lesdits éléments formant clés (24) fixés audit manchon (18), un capuchon (34) connecté audit cylindre (20), des moyens de ressort (40) sollicitant ledit capuchon (34) et ledit manchon (18) à l'opposé l'un de l'autre, de sorte que le déplacement manuel dudit capuchon (34) et dudit manchon (18) l'un vers l'autre déplace lesdits éléments formant clés (24), l'action de coulisement entre lesdites surfaces de support (58, 56A) desdits éléments formant clés (24) et des éléments filetés (28) déplaçant lesdits éléments filetés (28) à leur deuxième position extérieure.

7. Dispositif de couplage selon l'une quelconque des revendications précédentes, dans lequel lesdites première et deuxième surfaces tronconiques (19, 21) sur ledit deuxième élément (12) et lesdites première et deuxième surfaces de support tronconiques (56, 55) sur lesdits éléments filetés (28) s'étendent chacune avec le même angle par rapport à l'axe longitudinal du deuxième élément (12).

8. Dispositif de couplage selon l'une quelconque des revendications précédentes, dans lequel ledit bref mouvement de rotation dudit premier élément (10) provoque l'augmentation de la force de frottement entre lesdits filetages (16, 29) en raison de l'élasticité de la prise entre lesdits filetages (16) du premier élément (10) et lesdits filetages (29) desdits éléments filetés (28).

9. Méthode pour mettre en prise et dégager rapidement les premier et deuxième éléments de couplage (10, 12) pourvus de filetages extérieurs et intérieurs (16, 29), respectivement, comprenant les étapes consistant à :

introduire le premier élément de couplage dans le deuxième élément de couplage ;
l'introduction du premier élément amenant les filetages intérieurs (29) du deuxième élément de couplage, qui se visse* sur une pluralité d'éléments filetés (28) formant une partie dudit deuxième élément de couplage (12), à s'écarter l'un de l'autre par une action de coulisement le long de première et deuxième surfaces

tronconiques espacées (19, 21) dudit deuxième élément et de première et deuxième surfaces de support tronconiques (56, 55) desdits éléments filetés (28) ;

poursuivre le déplacement du premier élément de couplage (10) dans le deuxième élément de couplage (12) par un mouvement de coulissement ;

faire tourner brièvement le premier élément de couplage (10) de manière à ce que ses filetages extérieurs se mettent en prise étroitement avec les filetages intérieurs du deuxième élément de couplage (12), bloquant les éléments de couplage (10, 12) l'un à l'autre ;

faire tourner le premier élément de couplage (10) dans la direction opposée pour dégager la prise étroite entre les filetages extérieurs du premier élément de couplage (10) et les filetages intérieurs du deuxième élément de couplage (12) ;

déplacer les filetages intérieurs du deuxième élément de couplage (12) en les écartant l'un de l'autre ; et

retirer le premier élément de couplage (10) du deuxième élément de couplage (12) par un mouvement de coulissement.

30

35

40

45

50

55

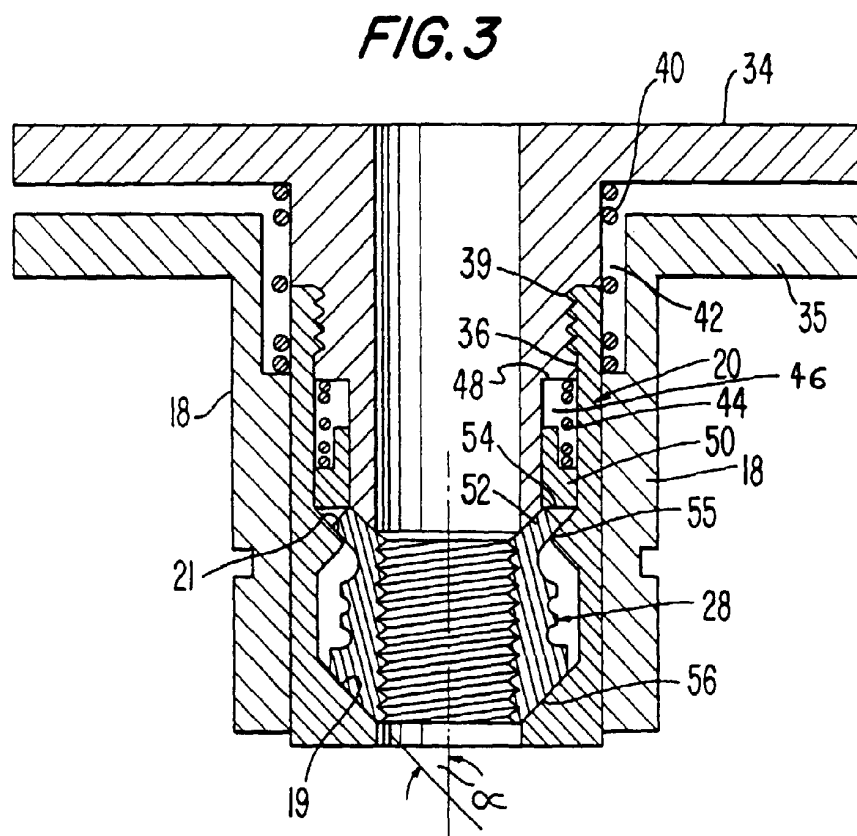
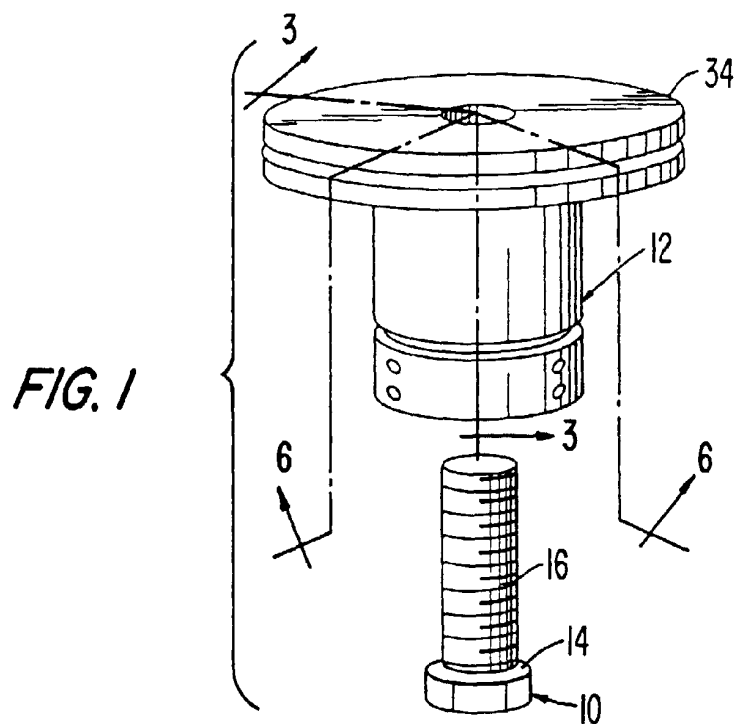


FIG. 2

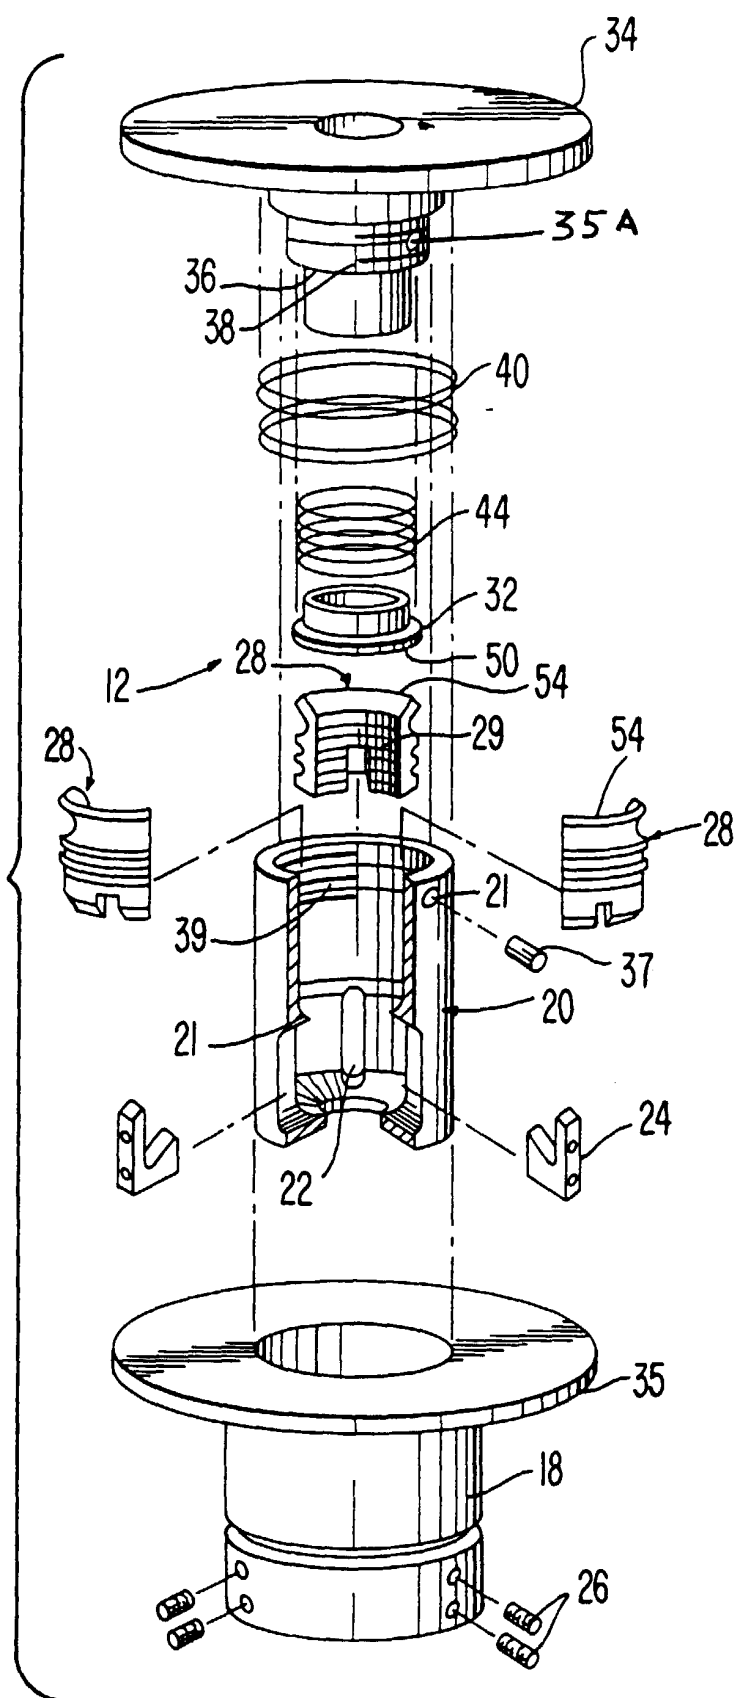


FIG. 6

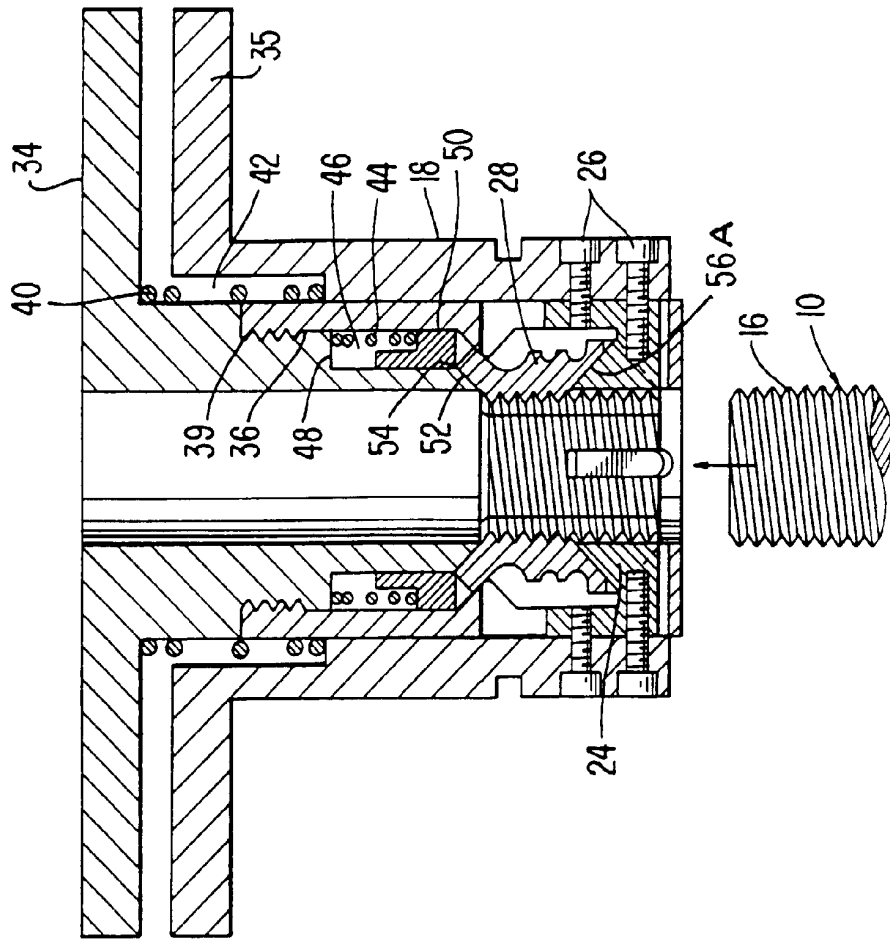


FIG. 4




FIG. 5

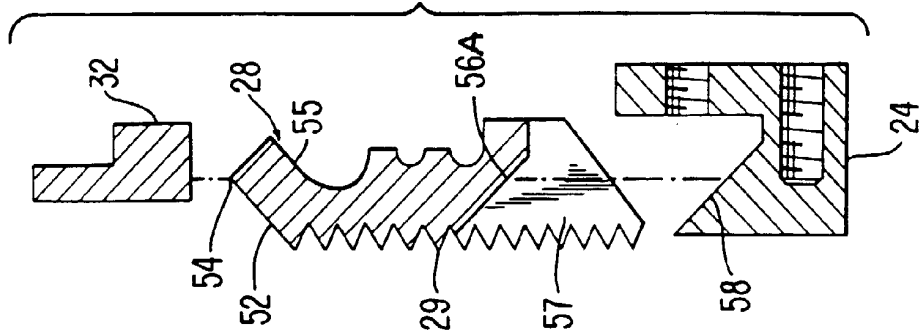


FIG. 7

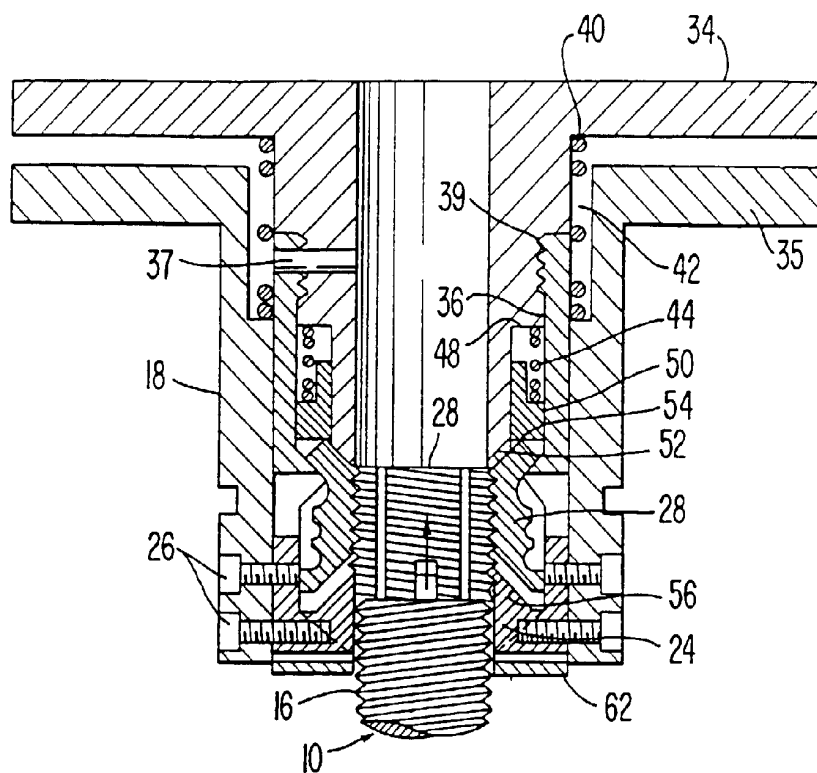


FIG. 8

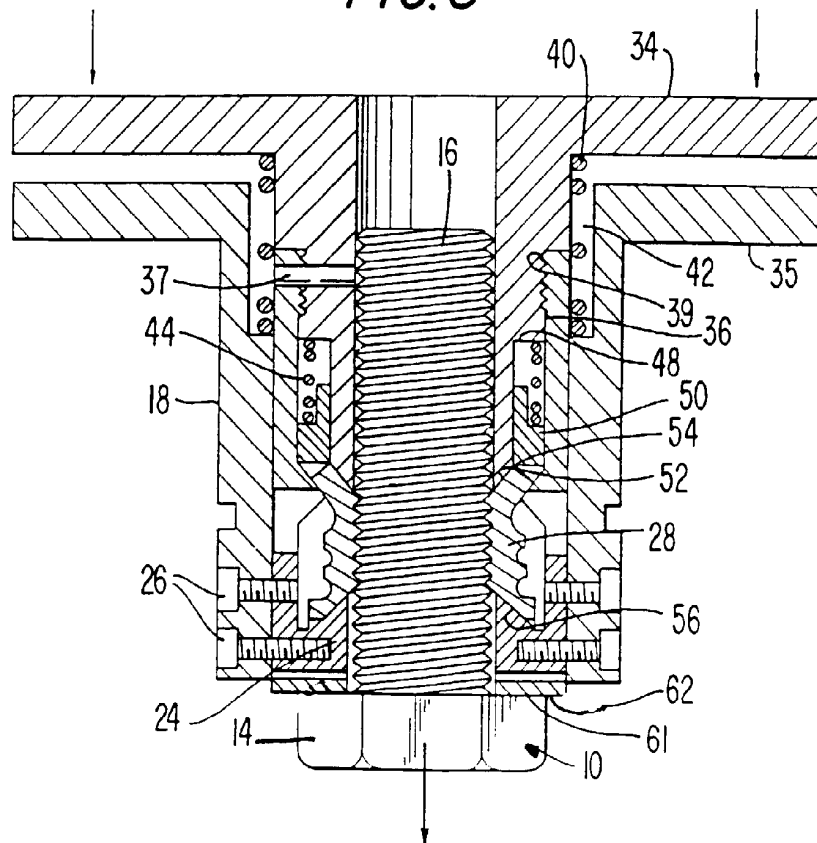


FIG. 9

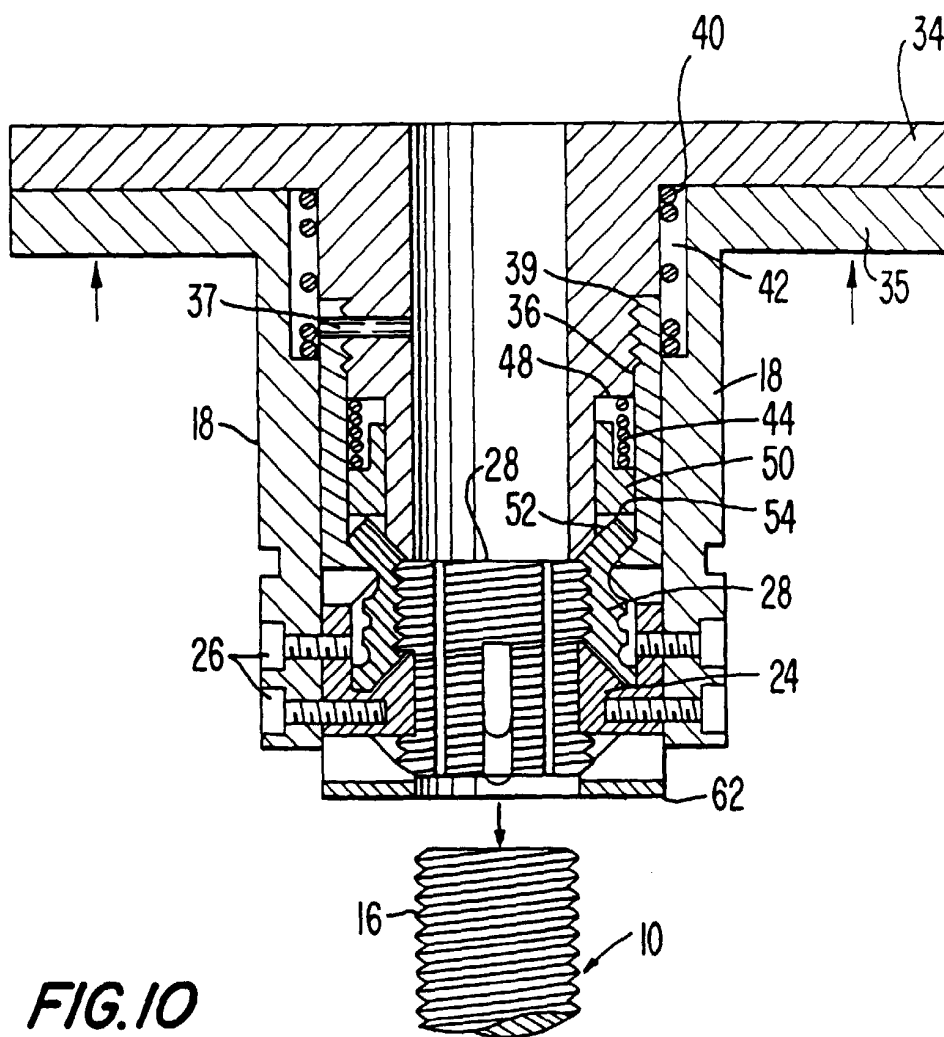


FIG. 10

